

FIG. 1a

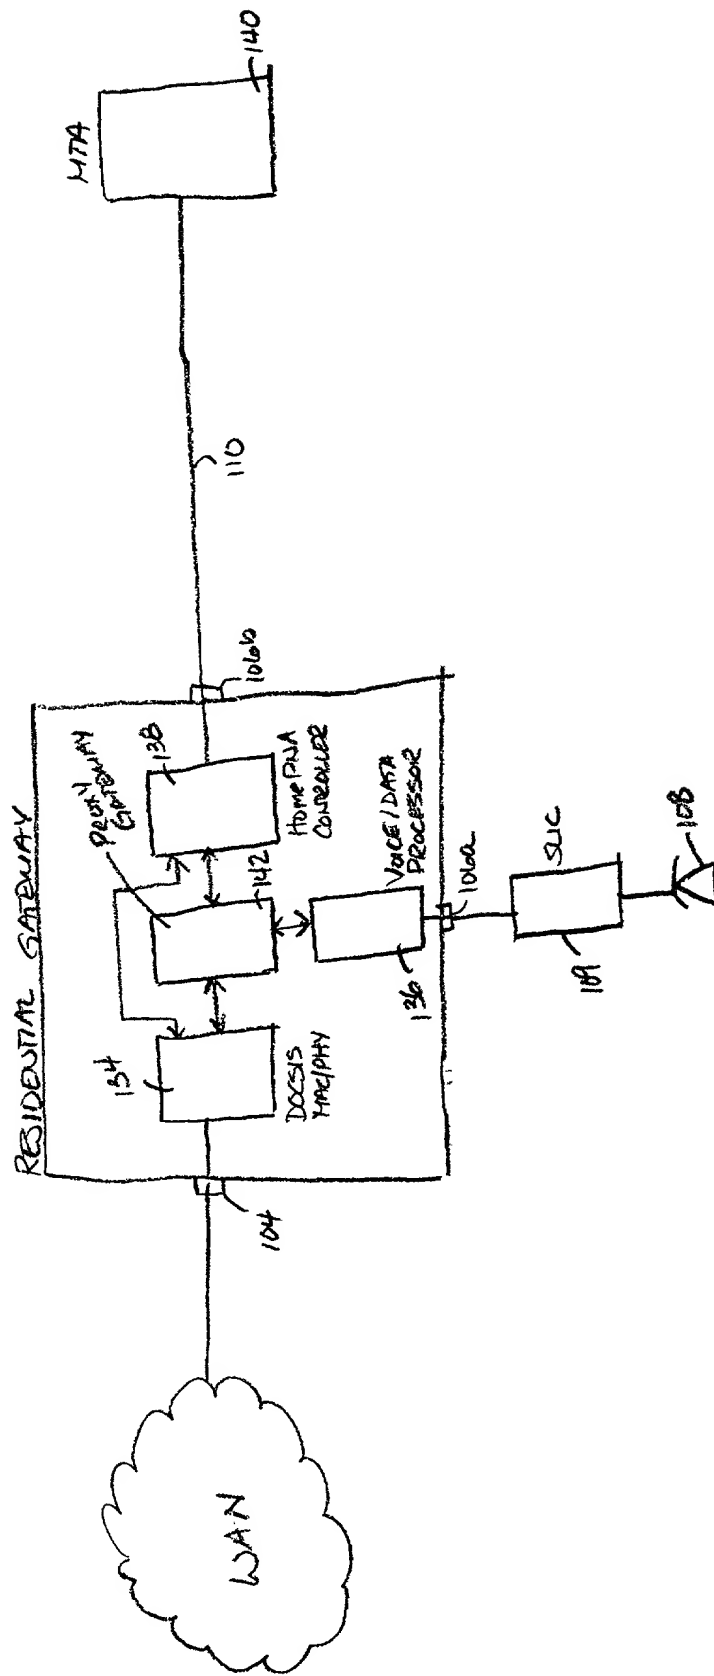


FIG. 1B

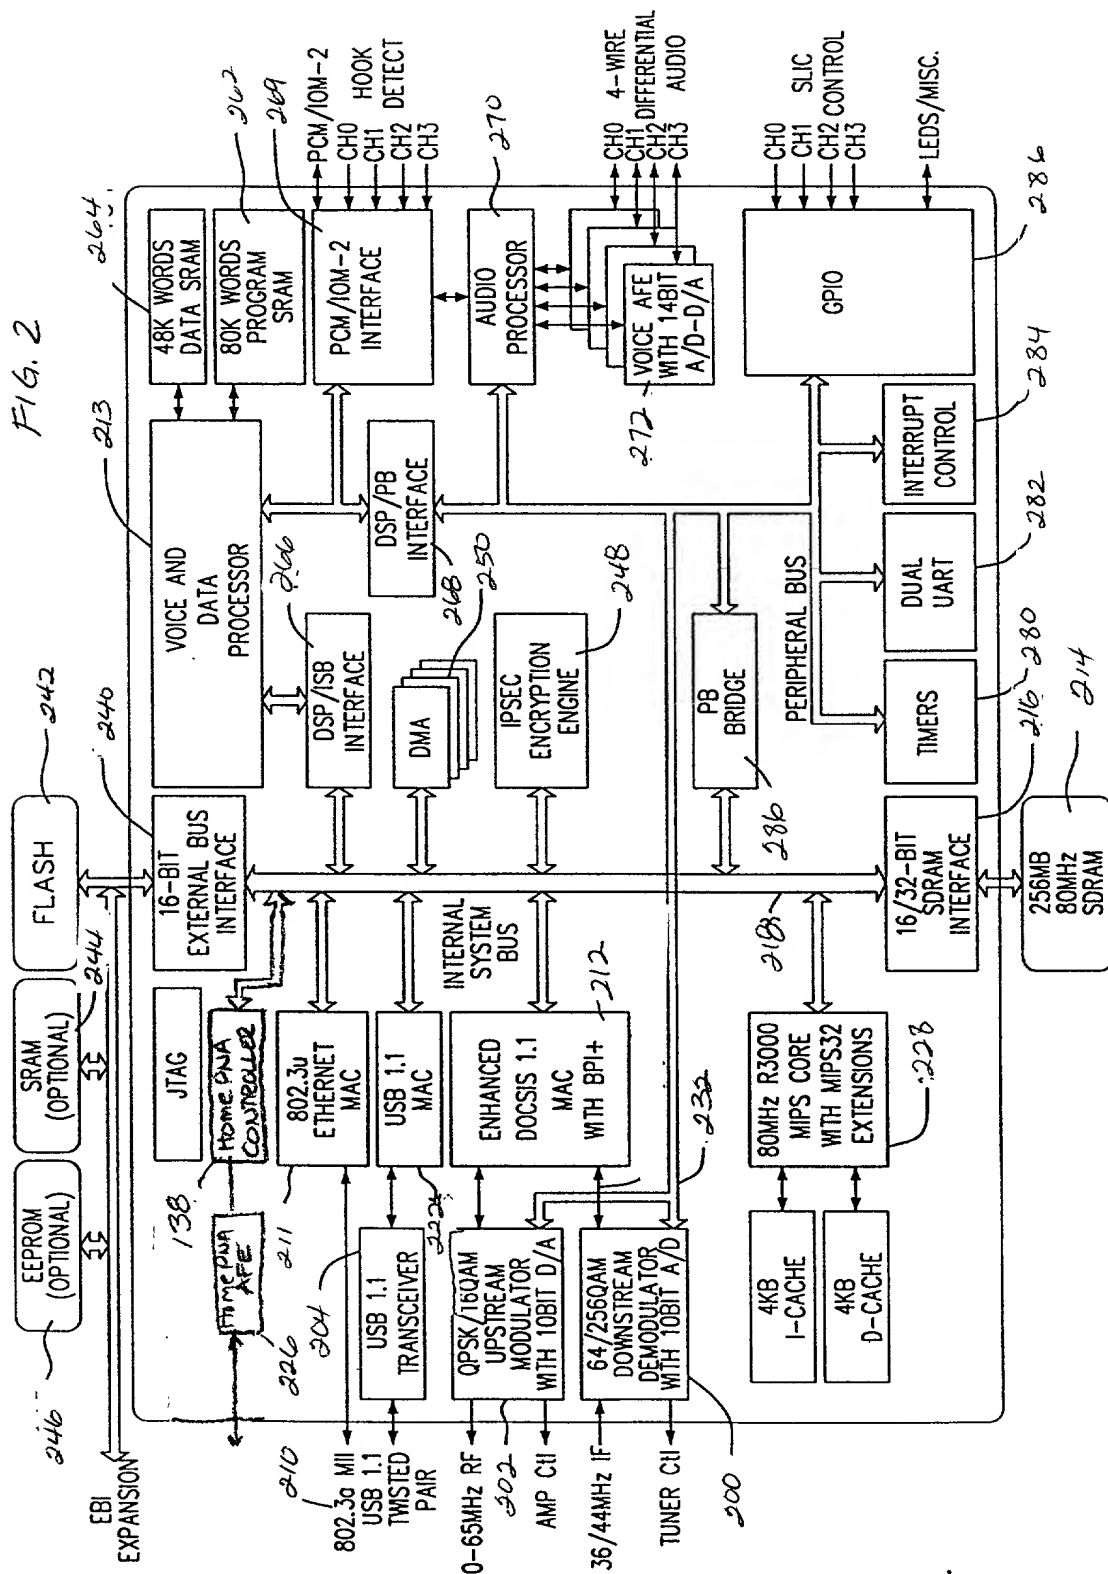


FIG. 3

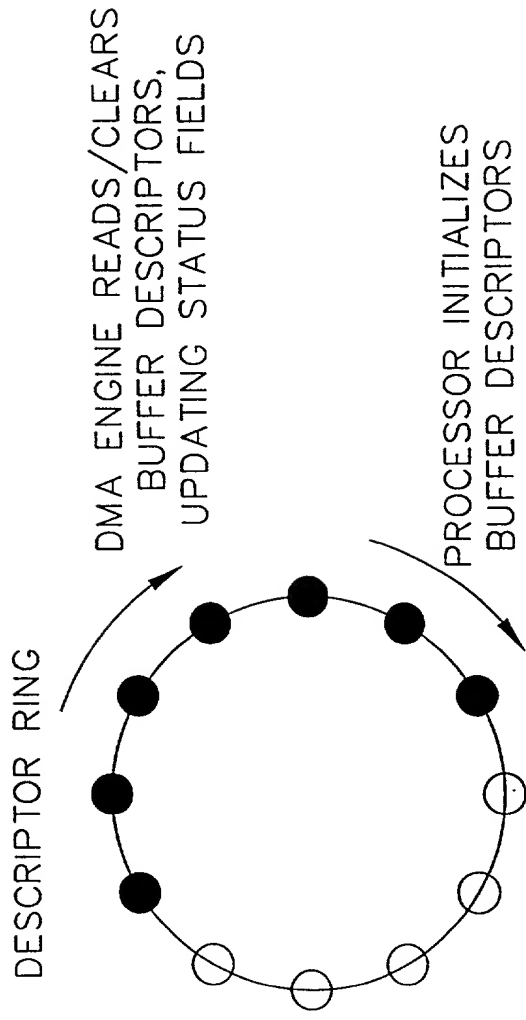
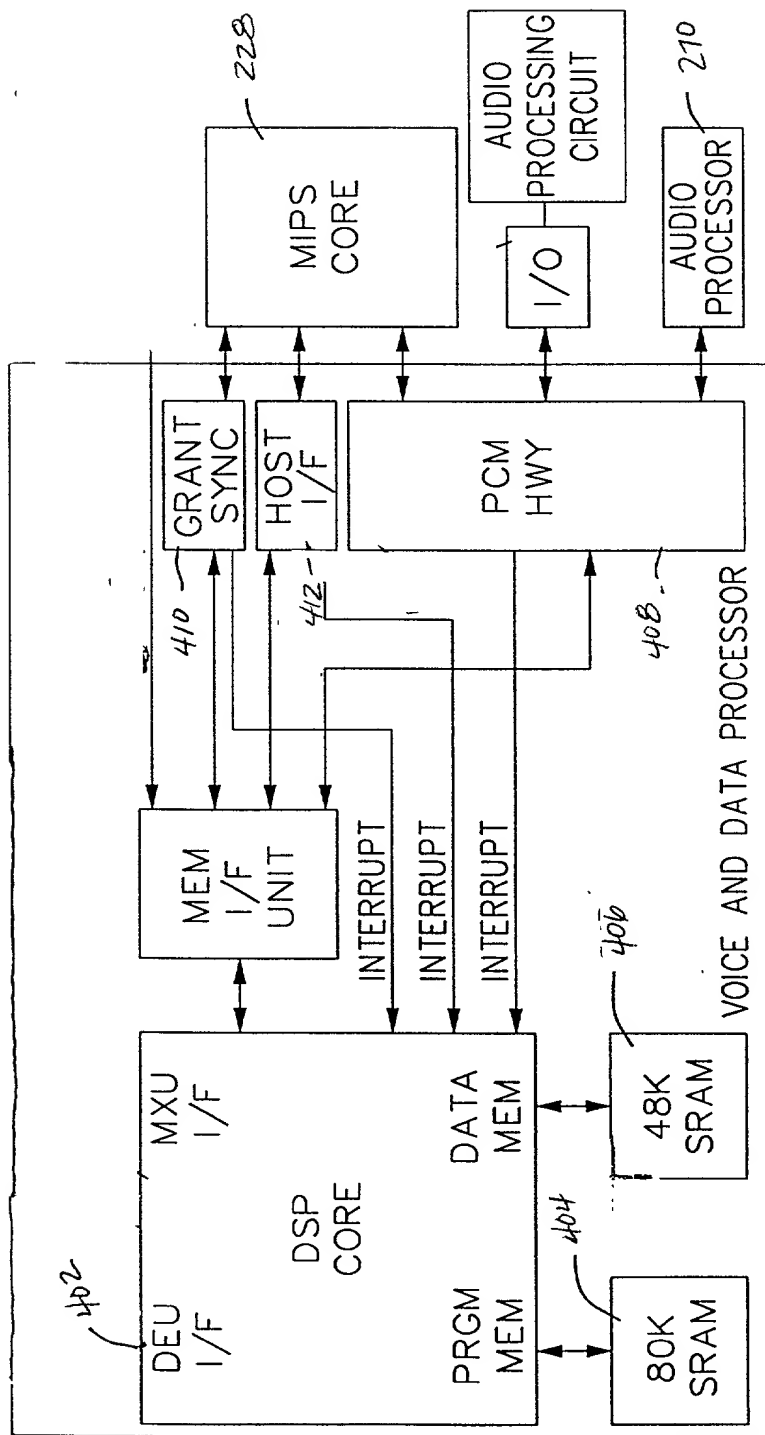


FIG. 4



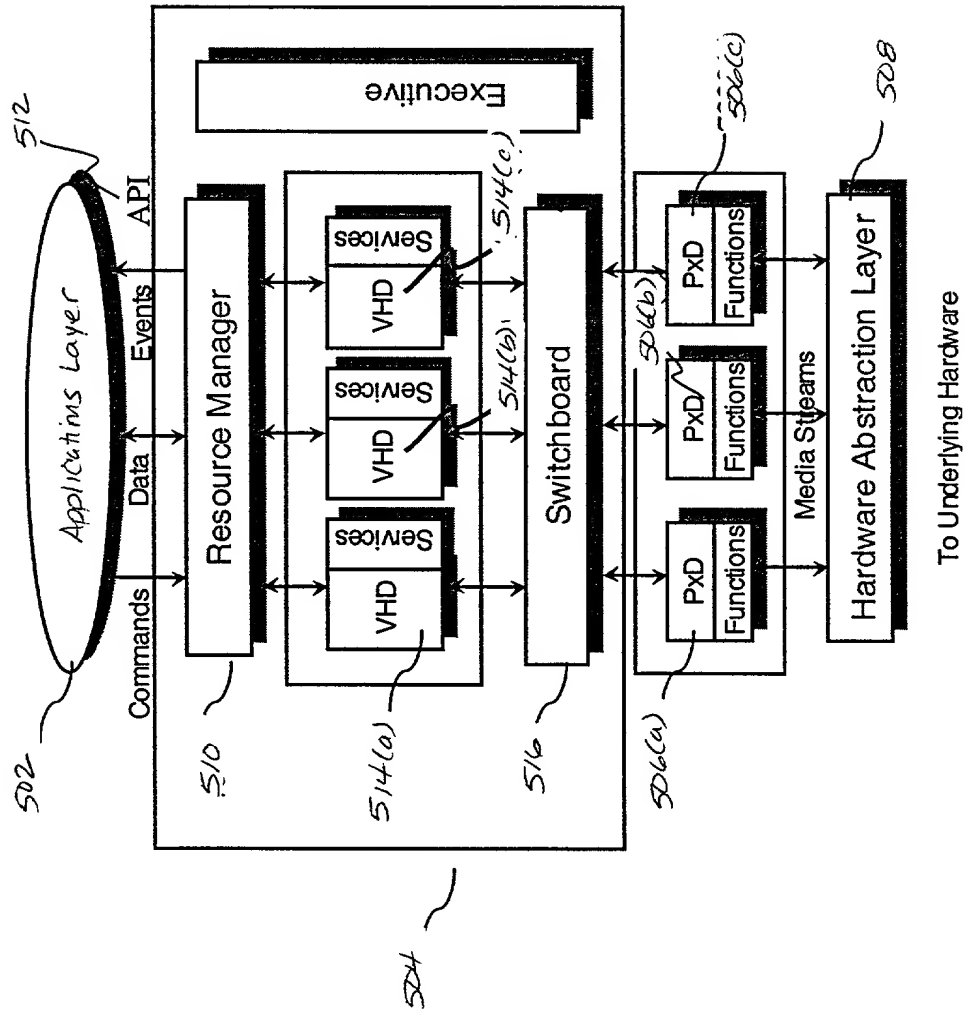


FIG. 5a

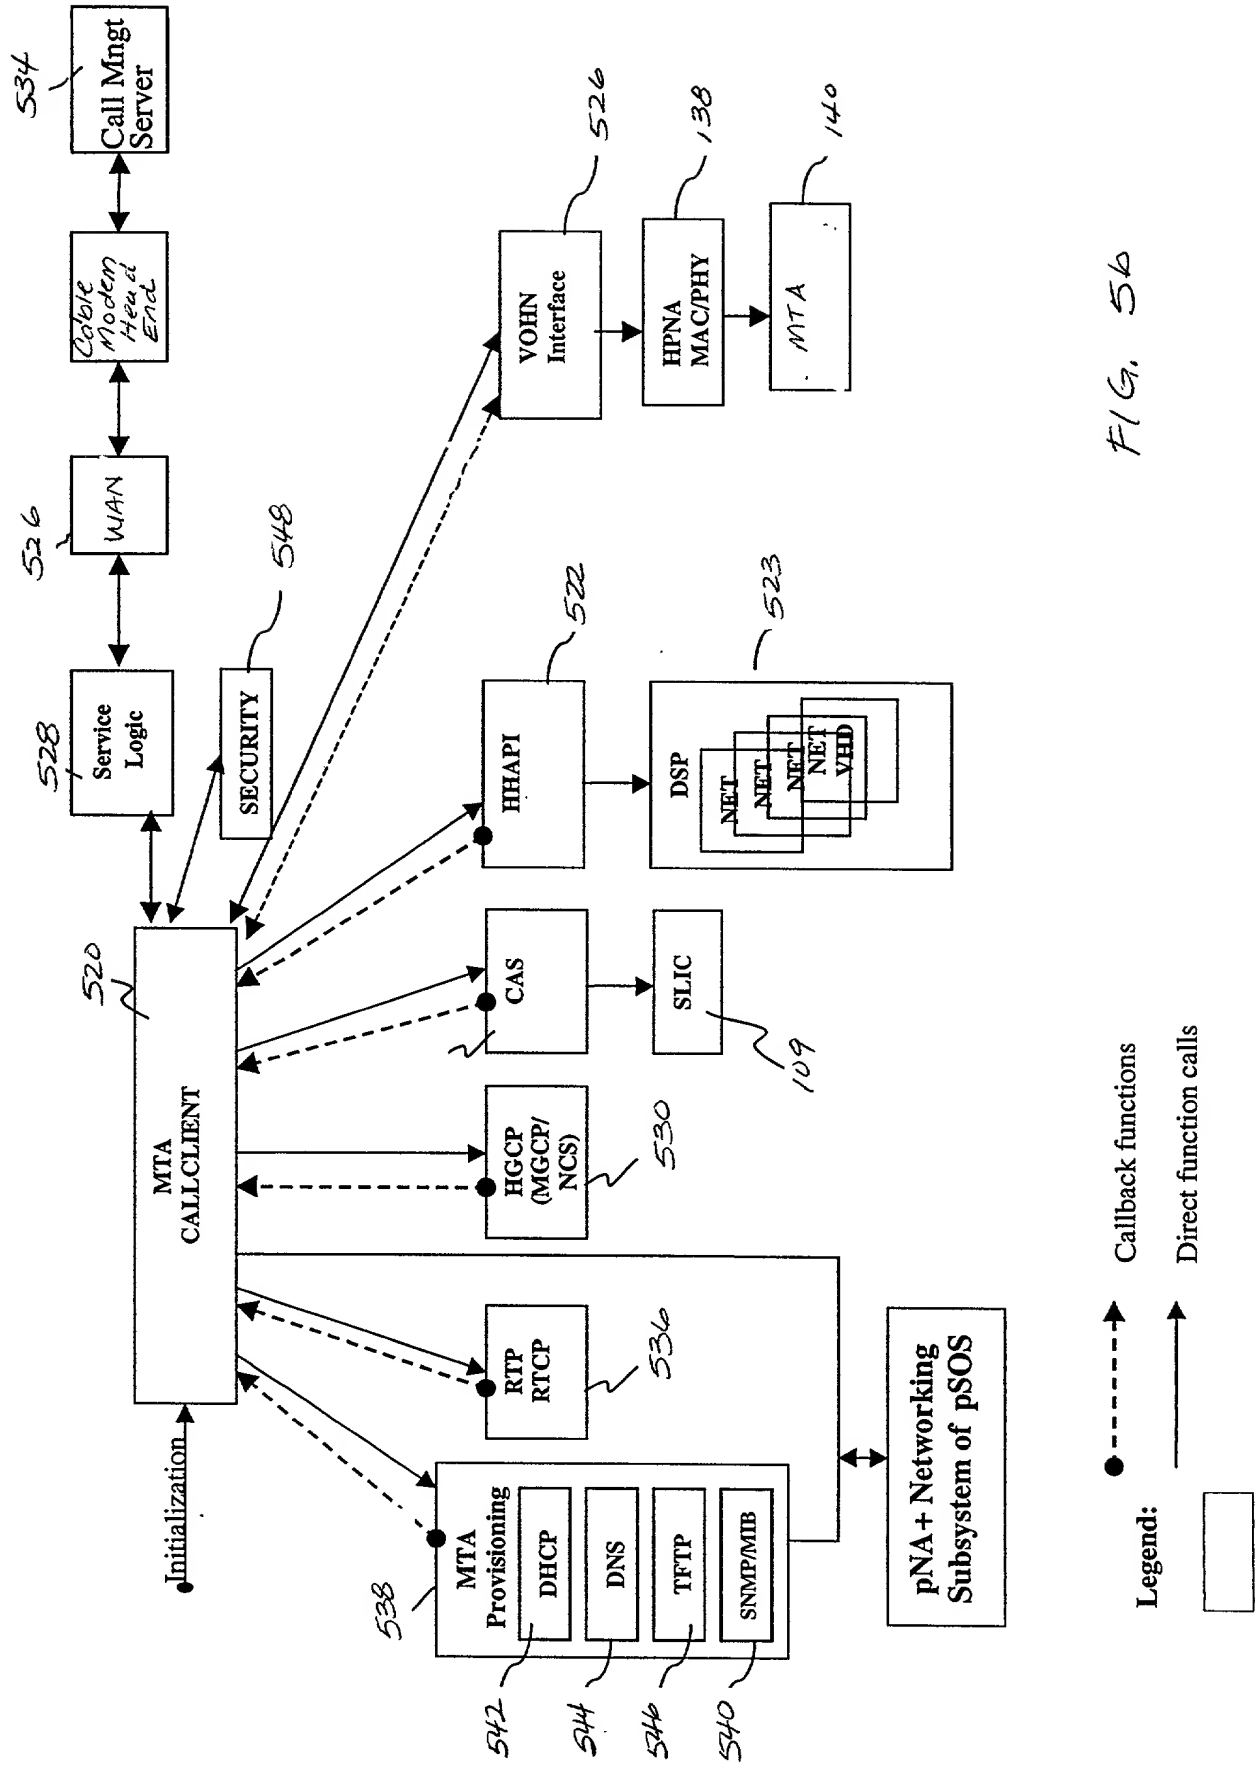


FIG. 5b

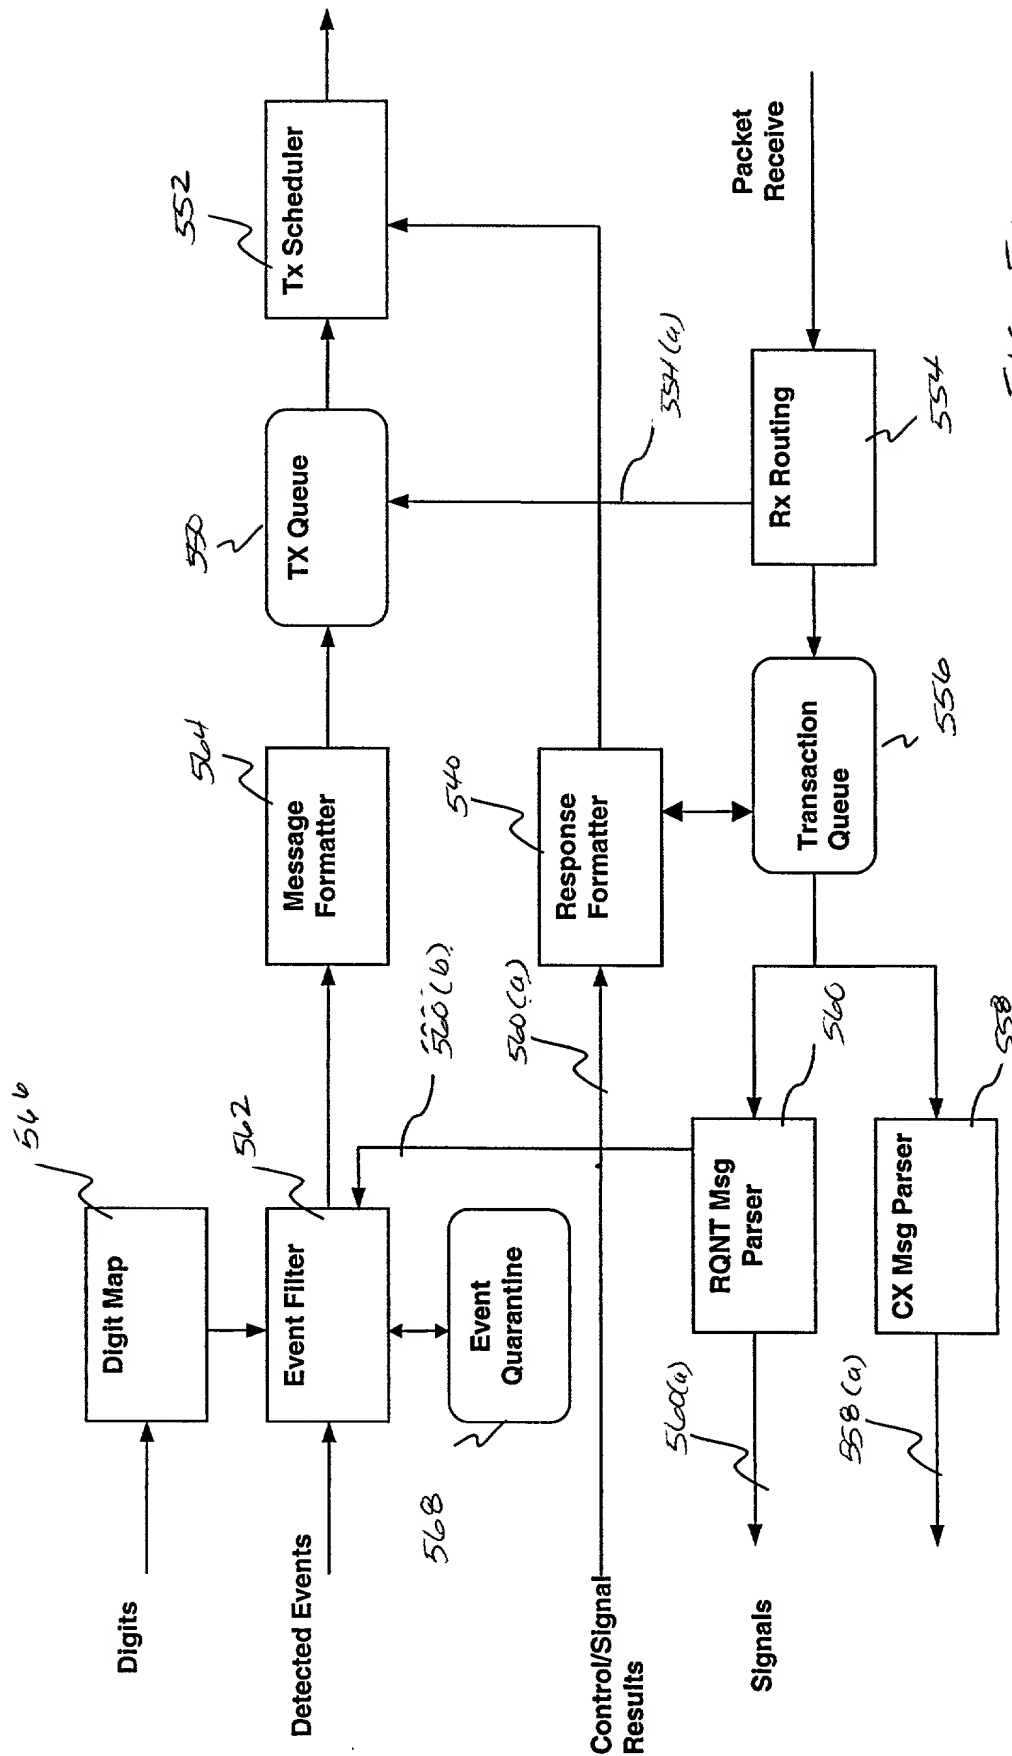


FIG. 50

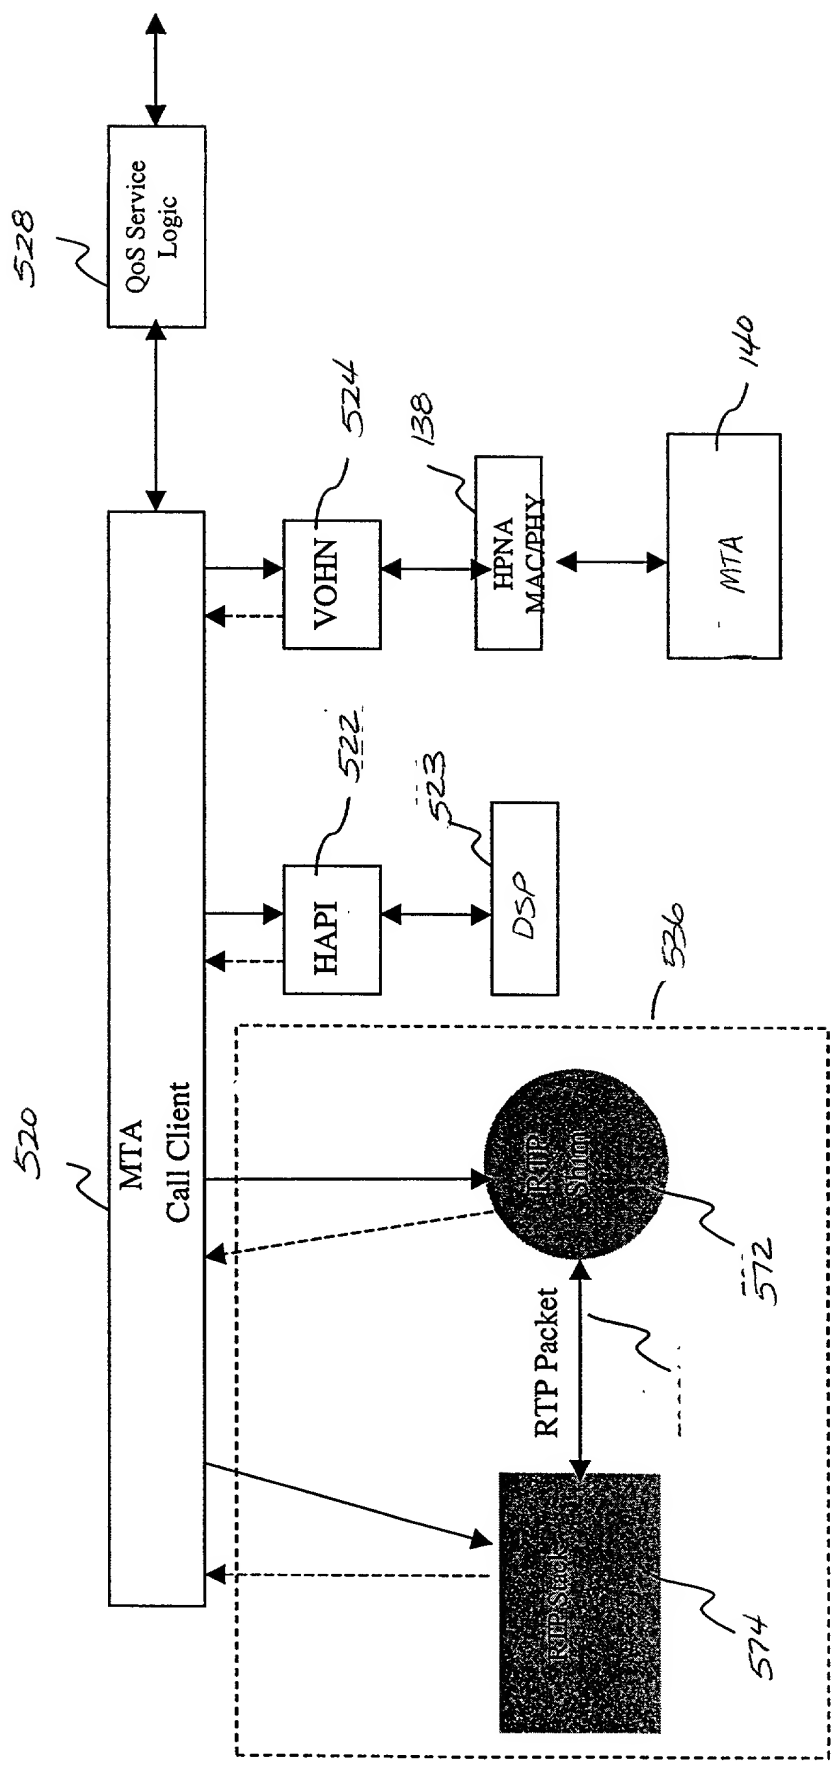


FIG. 5d

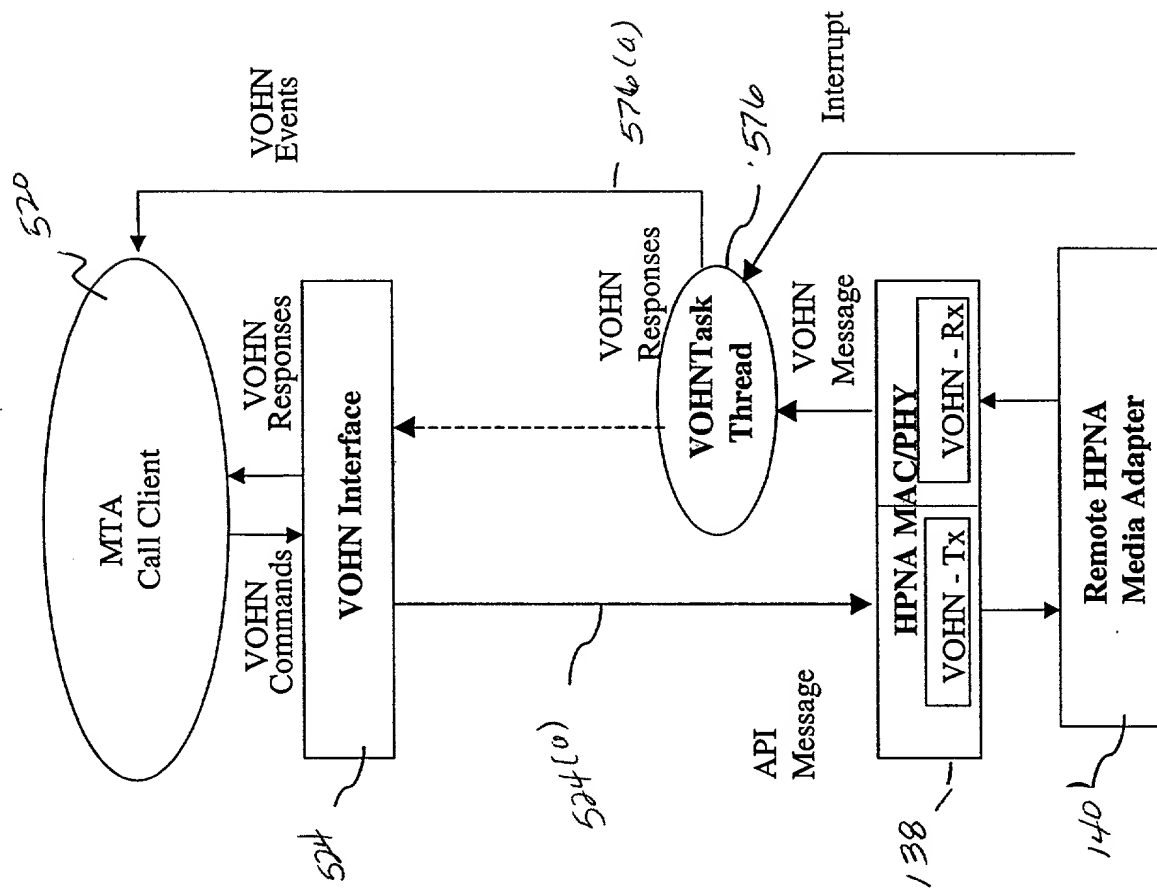


FIG. 5e

Call State	Proxy Gateway	Media Adapter
Idle	CAS: LCF →	CAS: LO (onhook) CAS: LC (offhook)
Offhook	←	
Dialtone	CAS: LCF CPTONE: Dialtone →	
Dialing	←	CAS: LC DIGIT: on
	CAS: LCF CPTONE: off →	
	←	CAS: LC DIGIT: off
	←	CAS: LC DIGIT: on
	←	CAS: LC DIGIT: off
Waiting	CAS: LCF CPTONE: ringback →	
Remote Answer	CAS: LCF CPTONE: off MODE: G729A →	
Talk	CAS: LCF MODE: G729A VOICE: G729A ↔	CAS: LC VOICE: G729A

FIG. 5f

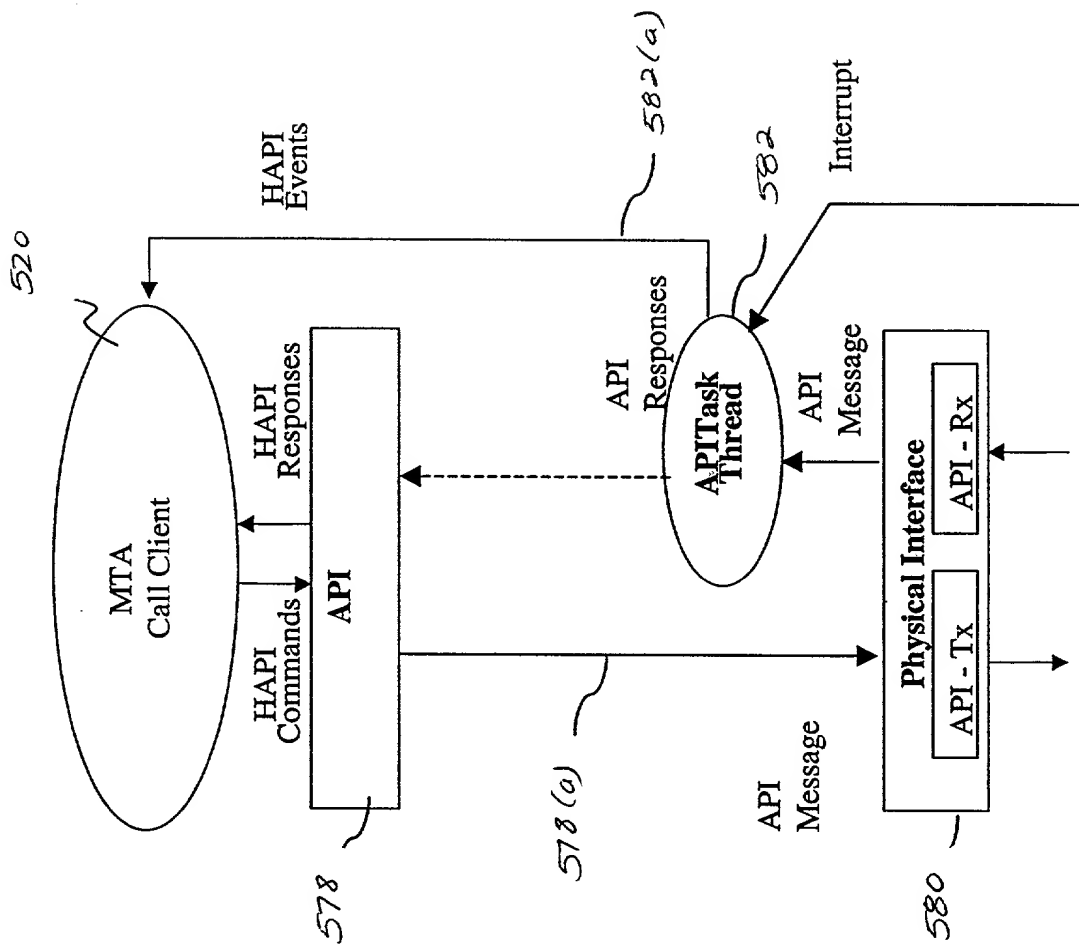


FIG. 5g

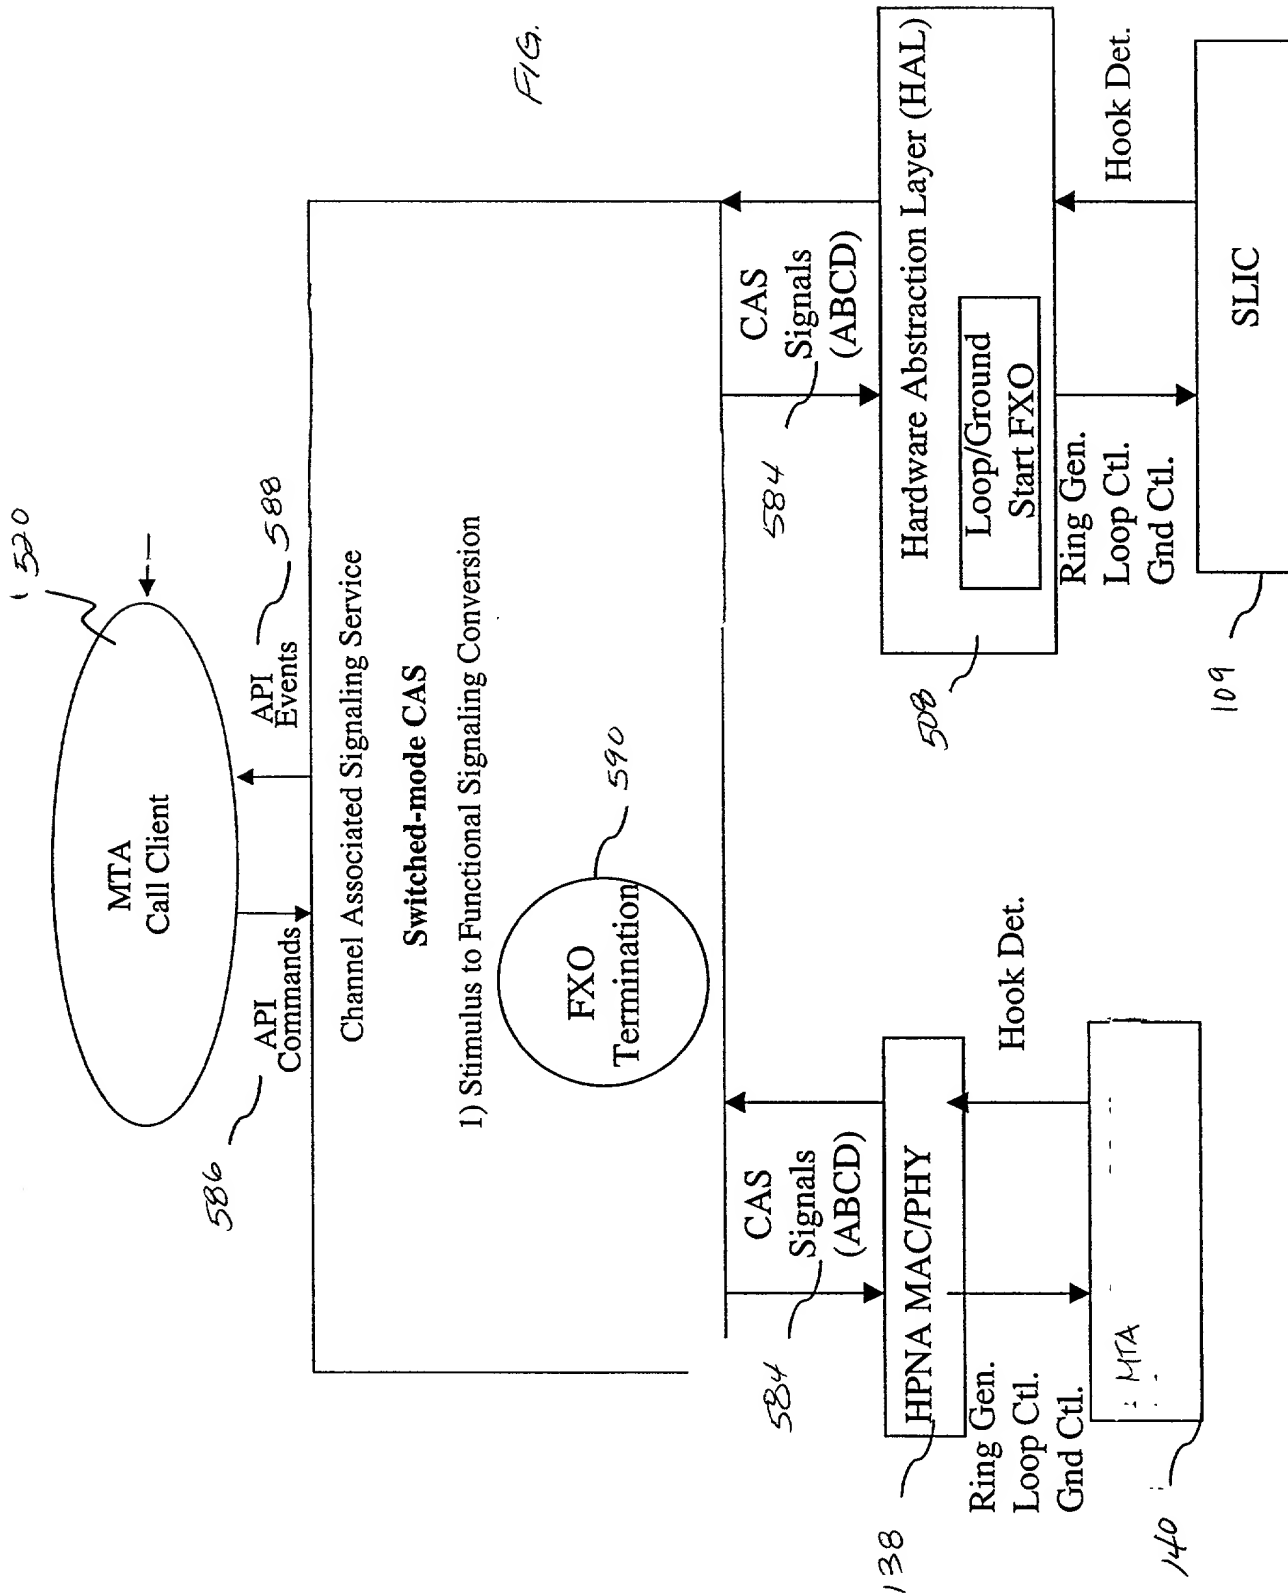


FIG. 5h

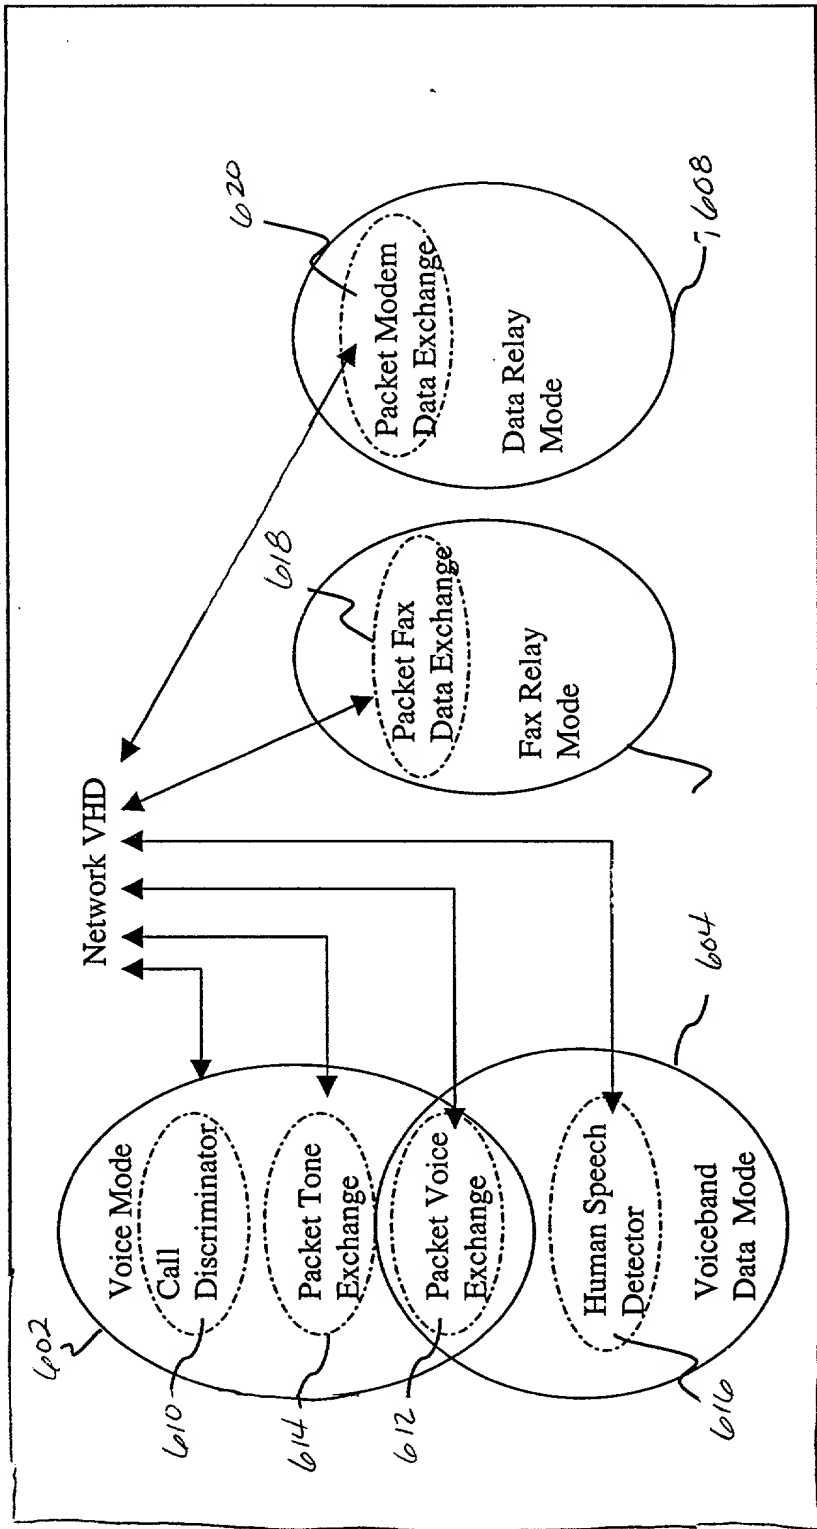


FIG. 6

Fig. 7

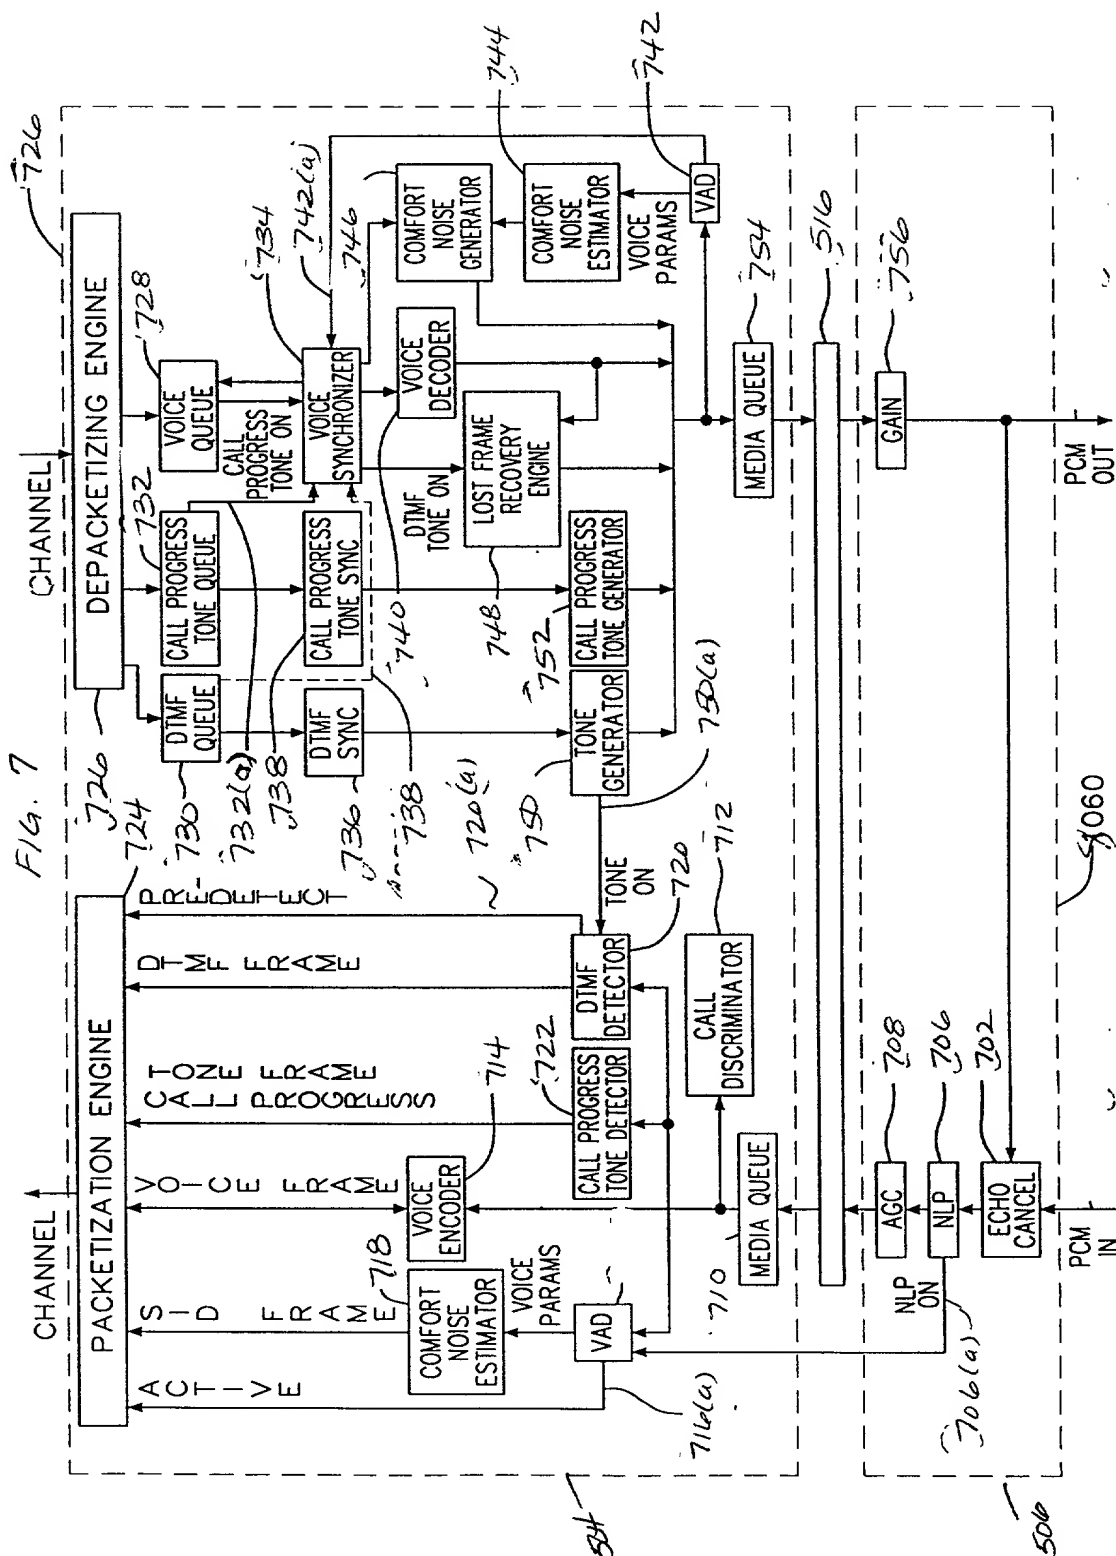
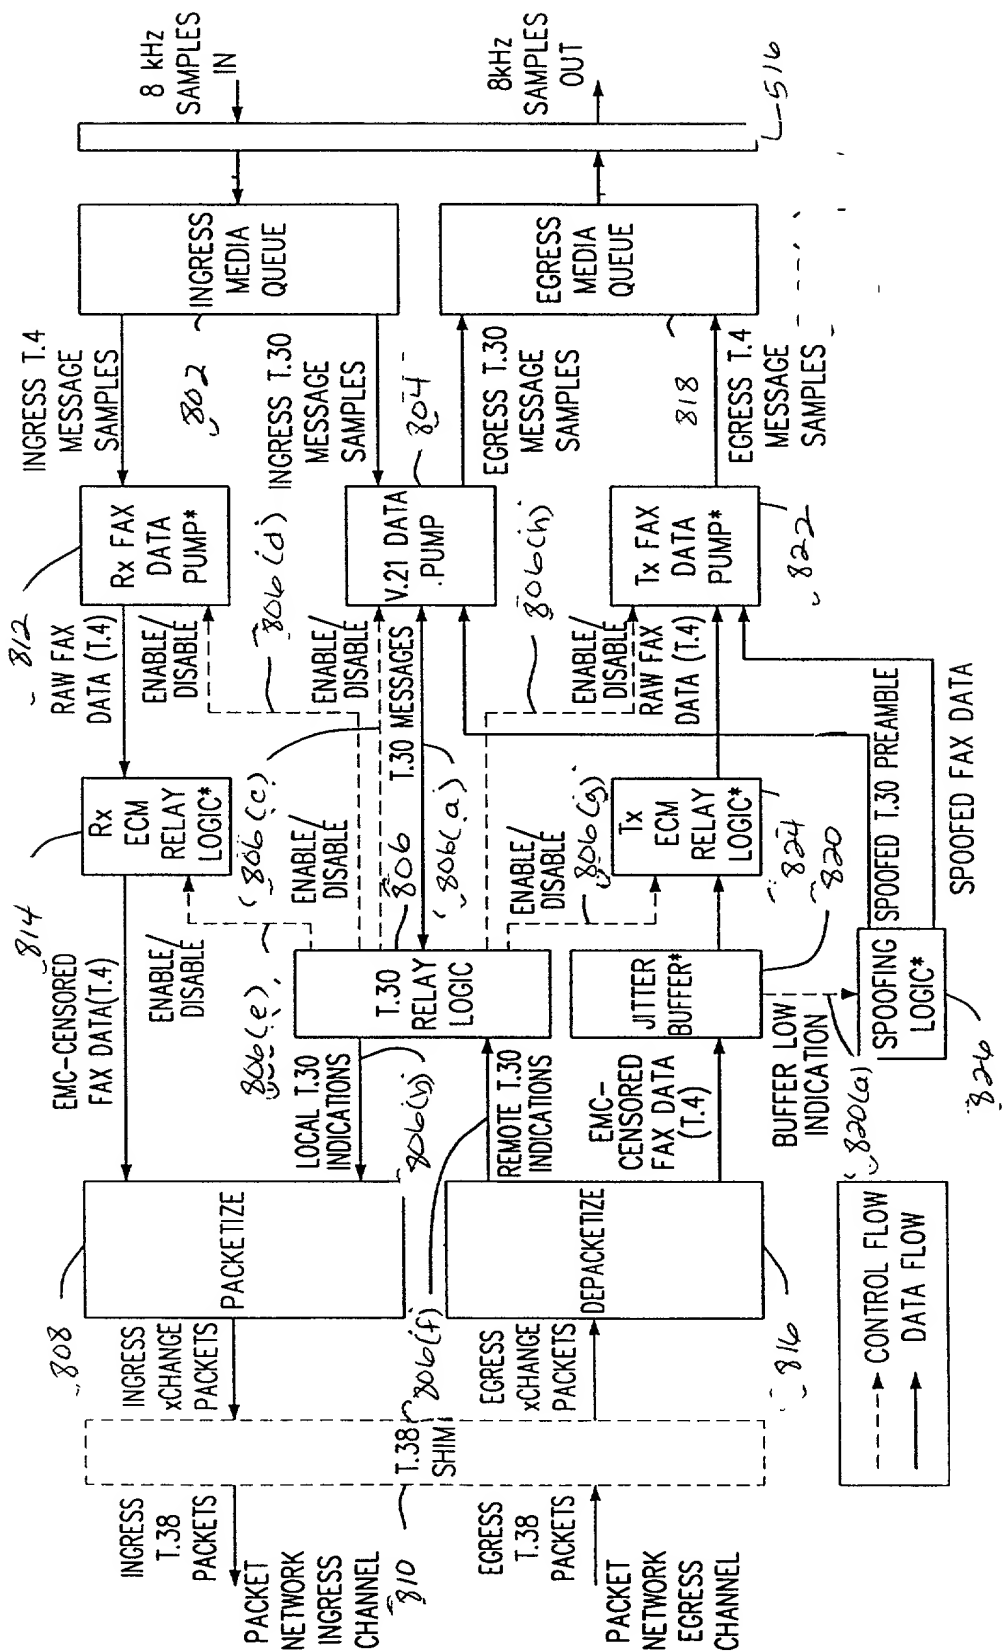
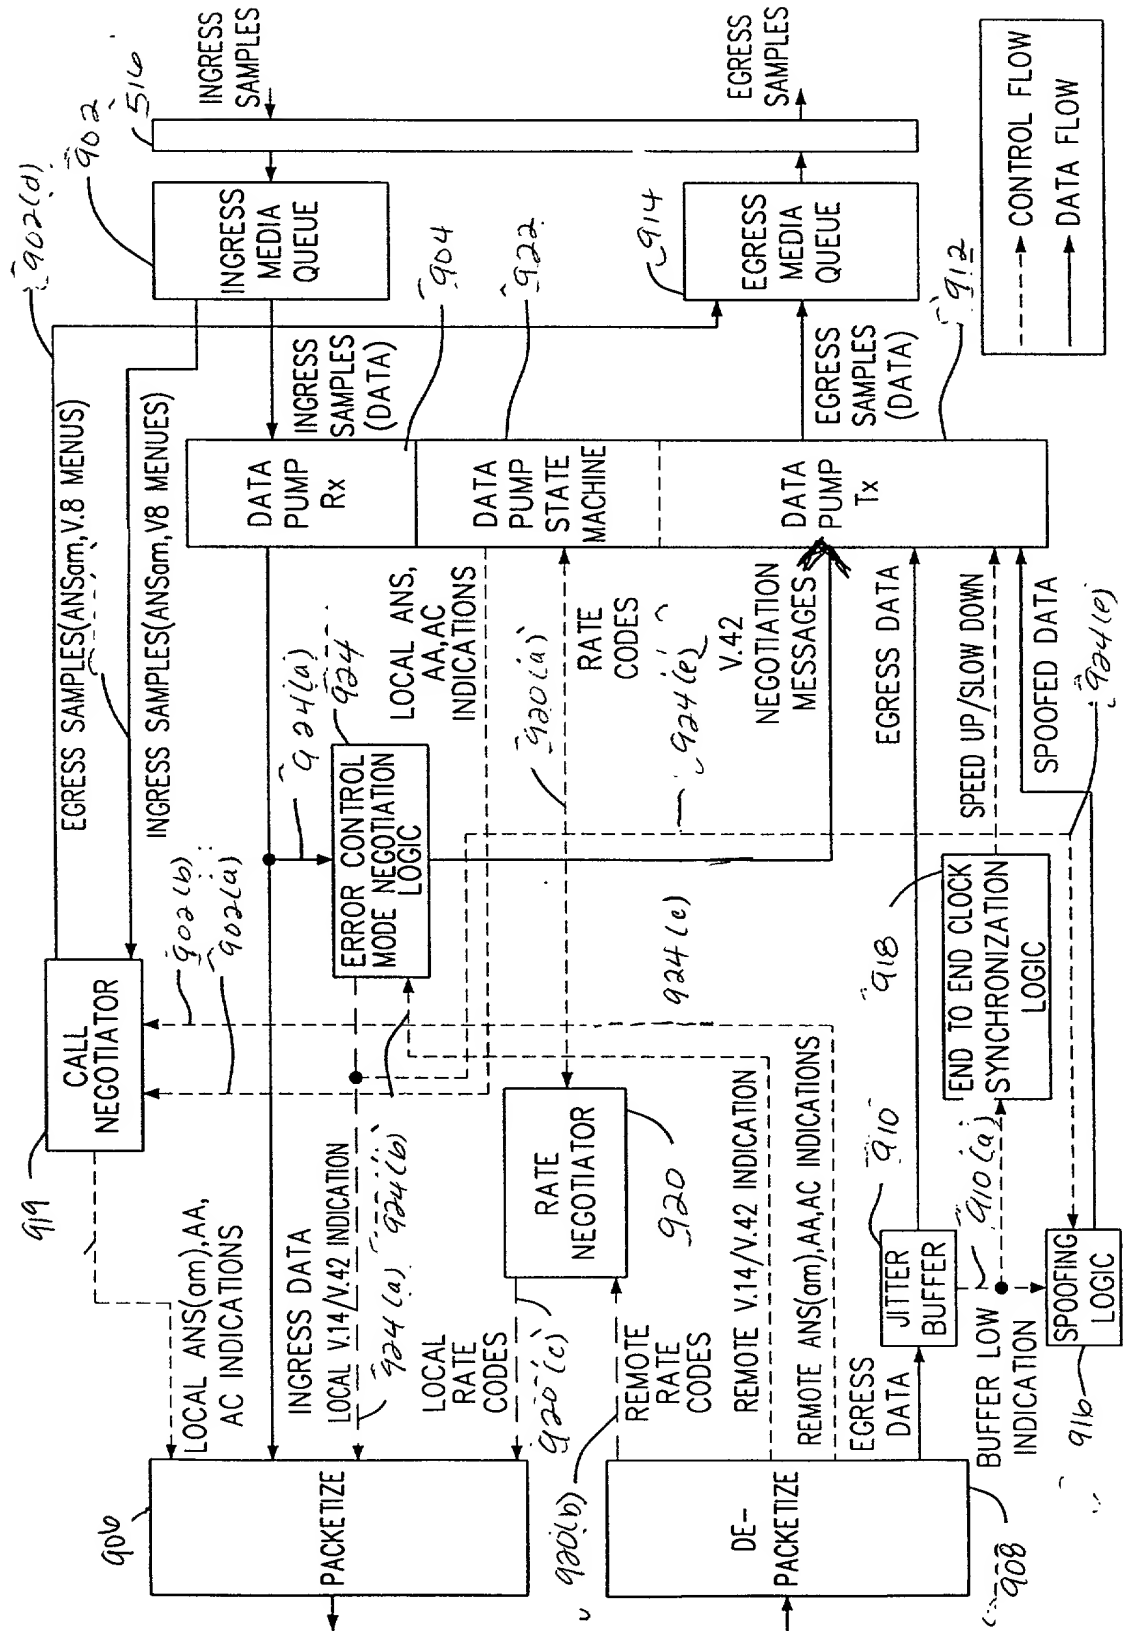


FIG. 8





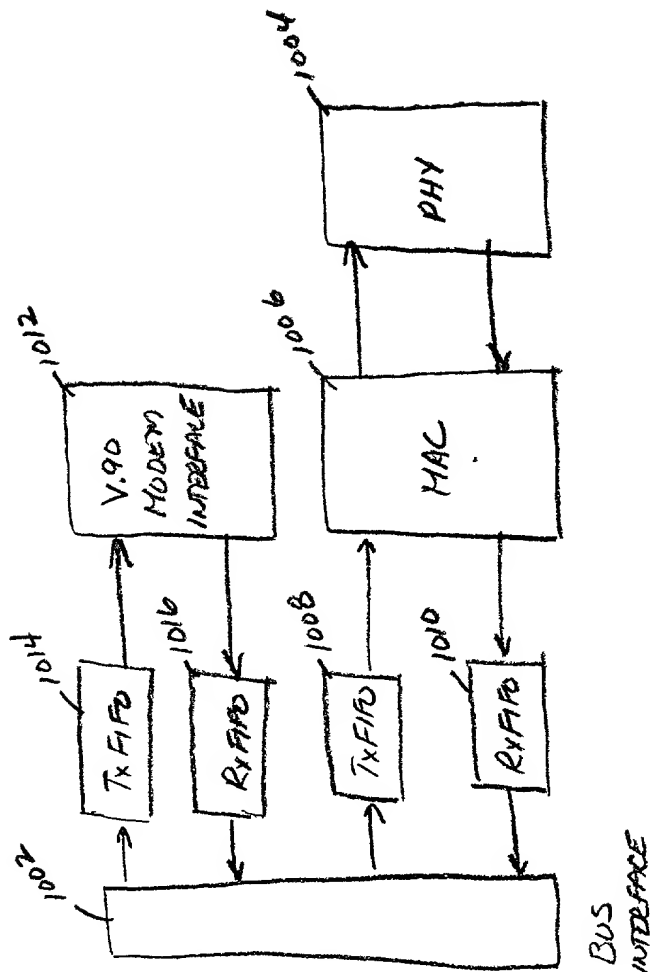


FIG. 10

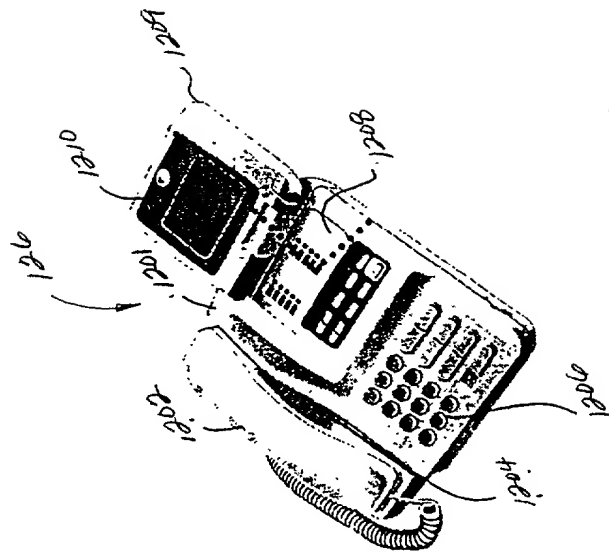


FIG. 12

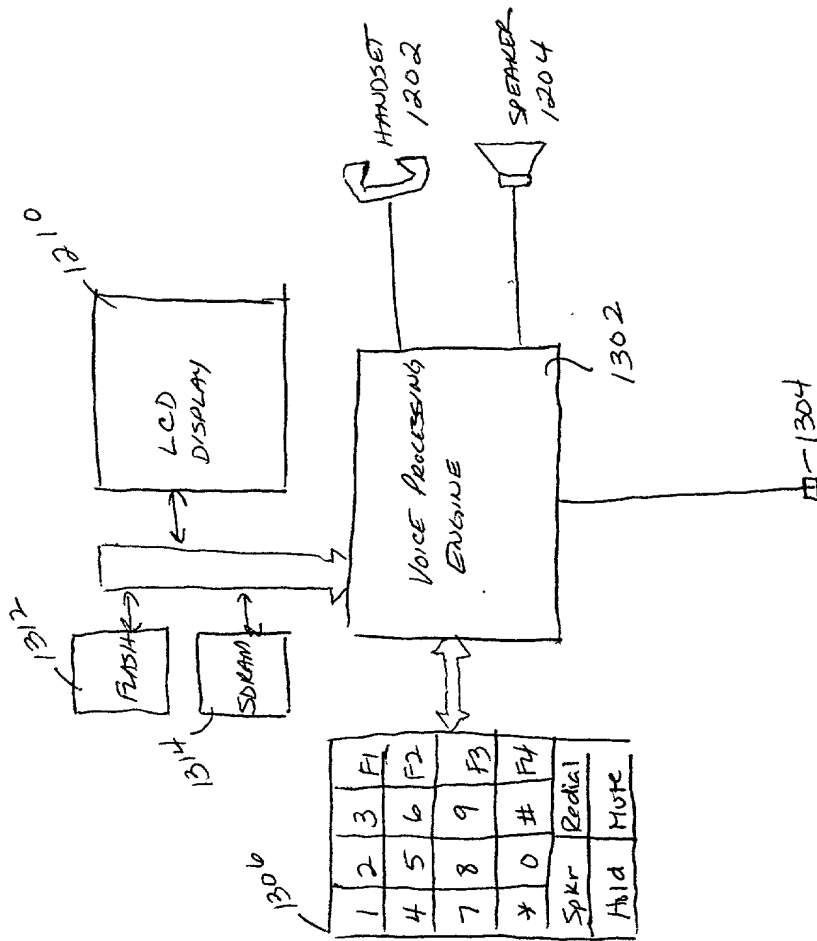


FIG. 13

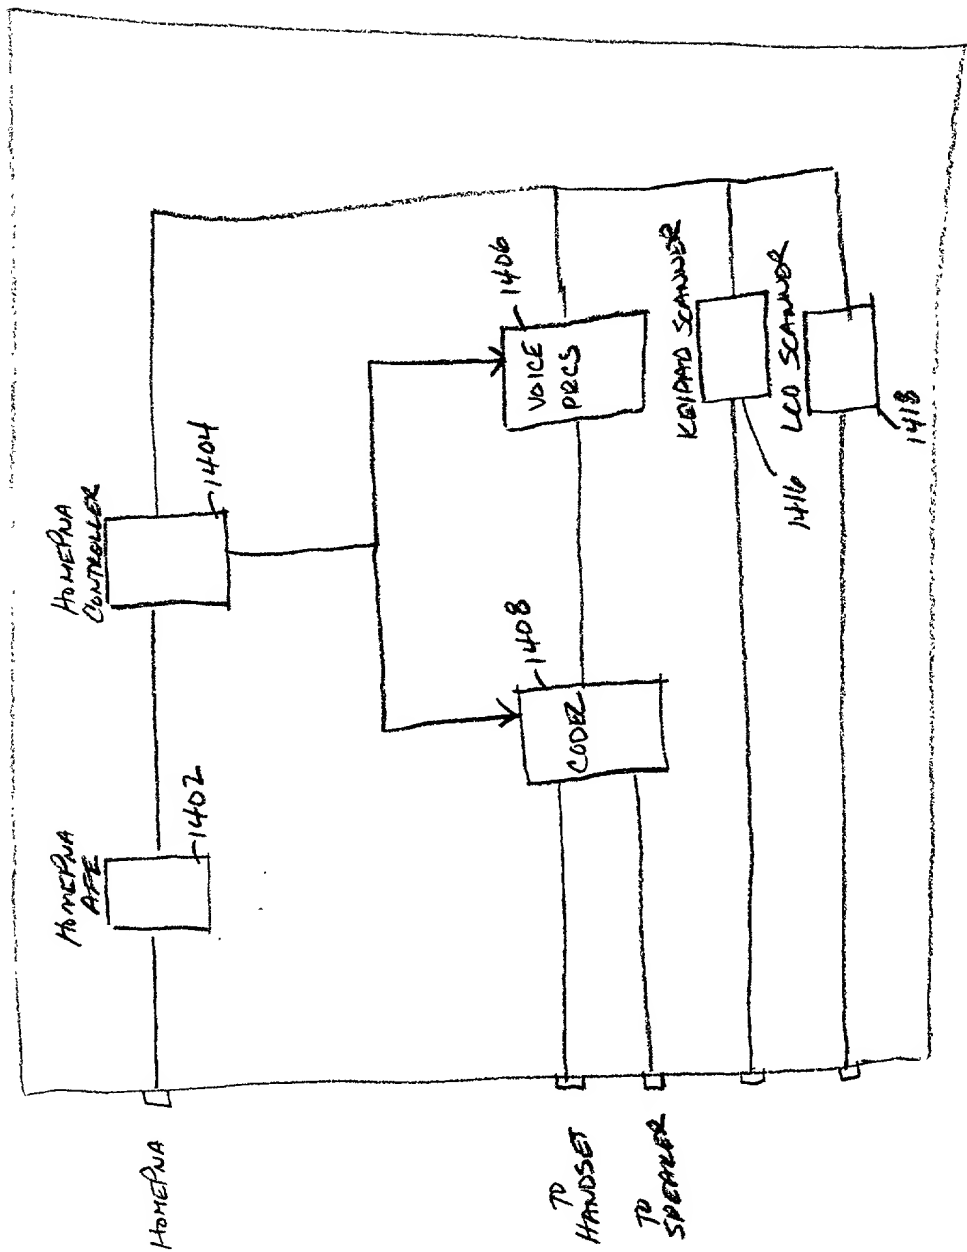


FIG. 14

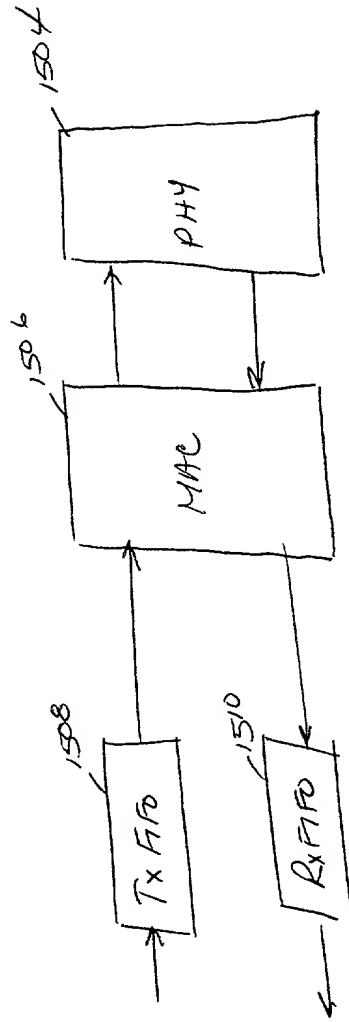


FIG. 15

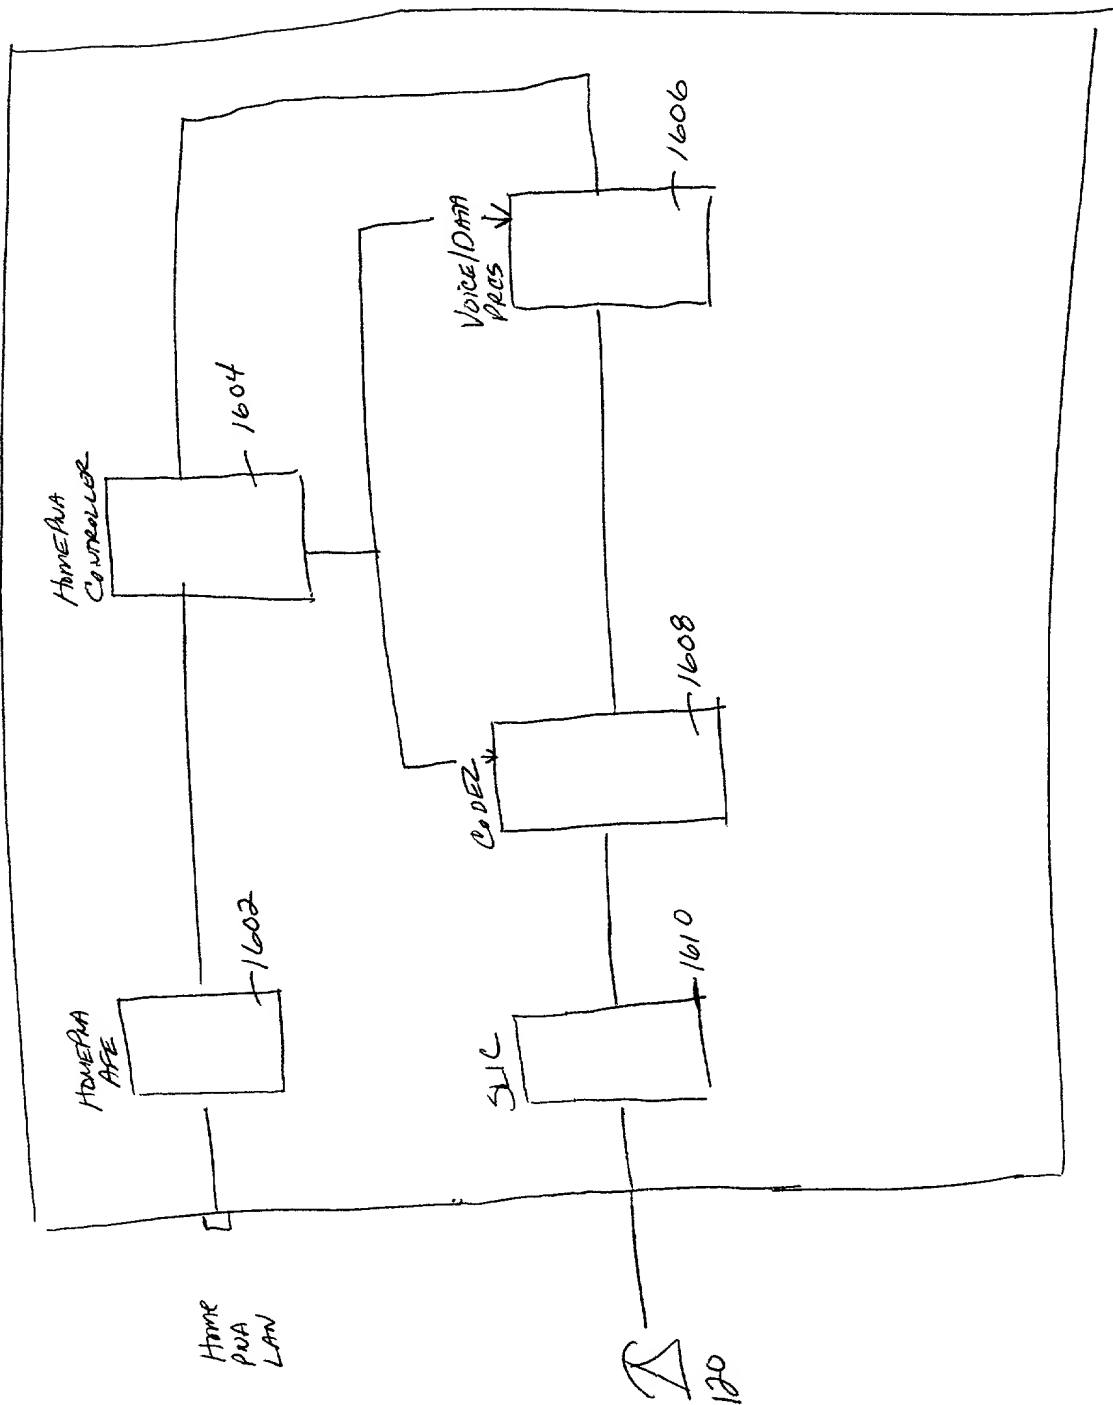


FIG. 16